

Truck Detail


- Aluminum body
- Stainless steel ball bearings
- Aluminum sheave
- Cast aluminum spindle



All shafts with overall length of more than 38'-6" are shipped in two sections.

Each section matched marked for field assembly. Exposed portion of jam sleeve must be **well lubricated** prior to assembly.

1-1/2" maximum shop gap allowed for field fitting (ram for tight joint)

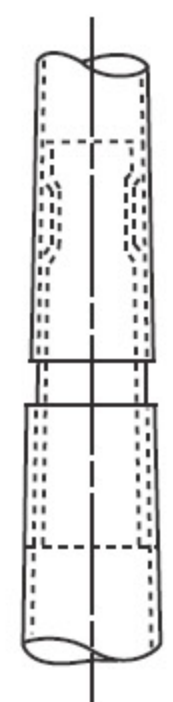

Anchor C25 25055188

Project:	Ground set tapered aluminum flagpole: ALLOY: 6063T6	Anchor Flag And Flagpole 2044 Hwy 9 West Longs, South Carolina 29568 800-637-3002 / 843-756-9161 FAX. 843-756-9161	Date:
Location:	Exposed height: 25'-0" Overall height: 28'-0"		Revision:
Architect:	Ship in 1 section Butt diameter: 5-1/2"	800-637-3002 / 843-756-9161 FAX. 843-756-9161	
Contractor:	Top diameter: 3-1/2" Wall thickness: .188"		Job:
Customer:	Finish: 100 grit polish		